

HX200/210L

Tier 4

Rated Power
125kw/2,200rpm

Operating Weight
HX200 19,900kg
HX210L 21,470kg

Bucket
0.9m³



* This sample may contain optional configurations, painting styles, and design changes

SPECIFICATIONS

ENGINE

Manufacturer	-	Cummins
Model	-	F4.5
Emission Standard	-	Tier 4
Rated Power(gross)	kW/hp/ps/rpm	125/168/170/2200
Rated Power(net)	kW/hp/ps/rpm	123/165/167/2200
Max. Torque	N.M/rpm	670/1300
Piston Displacement	cc	4500
No. of cylinder-Bore x Stroke	EA-mm	4-107×124
Battery	EA - V x AH	2-12*75
Starting Motor	V/kW	24/4.8
Alternator	V/A	28/70

HYDRAULIC SYSTEM

MAIN PUMP		
Flow/speed	l/min	2×228
PILOT PUMP		
Max. Flow	l/min	29
Working Pressure	kgf/cm ²	40
MAIN CONTROL VALVE		
Working Pressure	bar	350
Max. Flow	l/min	2×228
Type	-	Integral

SPECIFICATIONS

Swing Speed	rpm	10.54
Swing Torque	kN.m	65.3
Travel Speed	km/hr	5.1/3.3
Gradeability	deg	35
Max. Drawbar Pull	ton	22.6

UNDERCARRIAGE

Model		HX200	HX210L
Carrier Rollers	EA(Each Side)	2	2
Track Rollers	EA(Each Side)	7	8
No. of Shoes	EA(Each Side)	46	49
Ground Pressure	kgf/cm ²	0.48	0.46


WORKING DEVICE

Boom Length	mm	5,680
Arm Length	mm	2,700
Bucket Capacity(Standard)	m ³	0.9
Bucket Digging Force (ISO)	ton	15.4
Arm Digging Force (ISO)	ton	11.6

OTHERS


Fuel Tank	ℓ	395
Hydraulic Tank(System)	ℓ	160(280)
Engine Oil	L	13
Engine Coolant	L	34
Gear Oil of Swing Device	L	6.2
Gear Oil of Walking Motor	L	4.5×2
Intake Type		Turbocharged
Fuel Supply Mode		High Pressure Common Rail

DIMENSIONS & WORKING RANGE

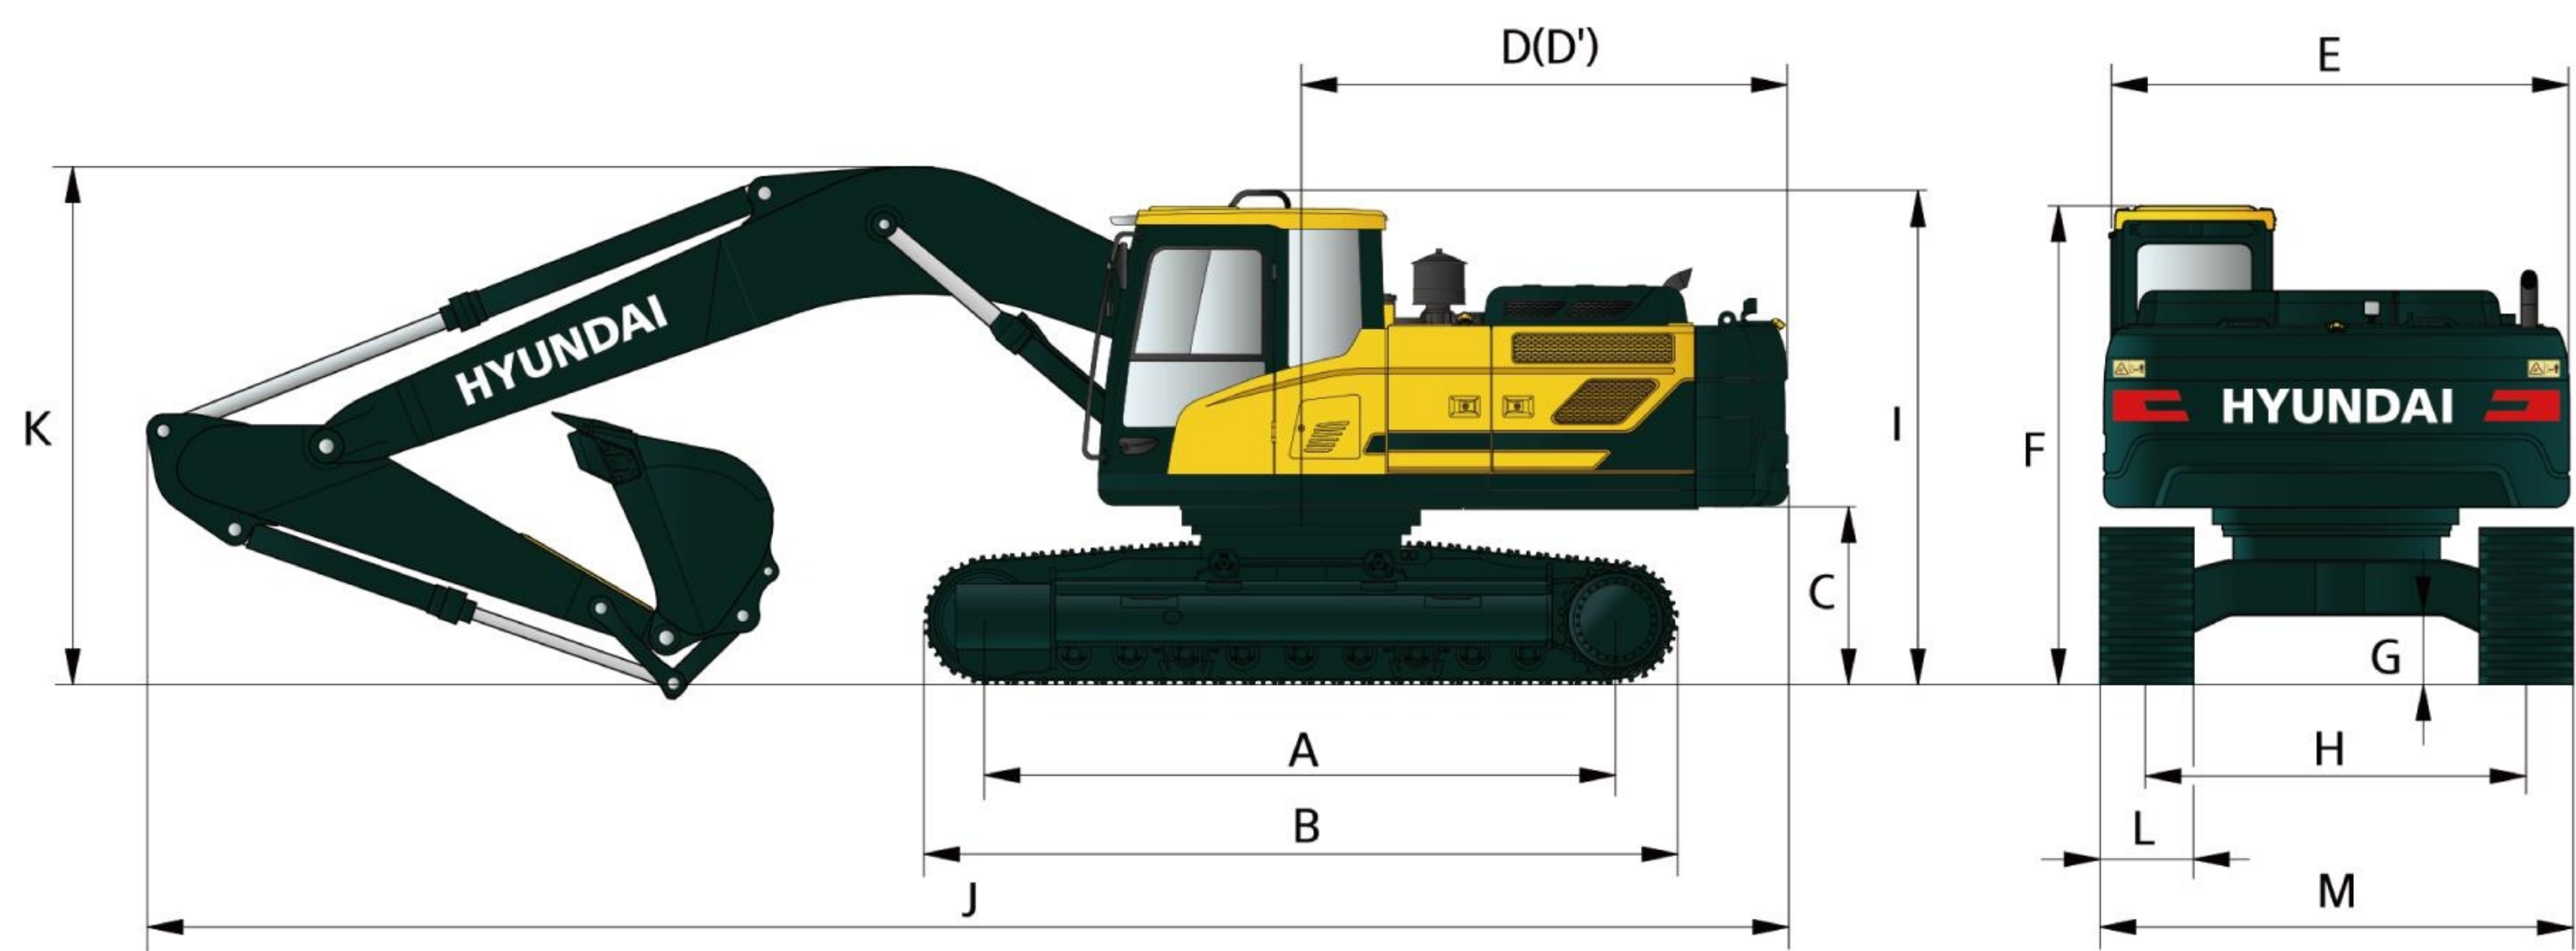

Unit: mm

型号	HX200	HX210L
J Overall Length	9,525	9,535
M Overall Width	2,800	2,990
E Overall width of upperstructure	2,750	2,750
K Overall height of boom	3,010	3,030
F Overall height of cab	3,030	3,030
H Track gauge	2,200	2,390
A Tumbler distance	3,360	3,650
B Overall length of crawler	4,165	4,445
L Track shoe width	600	600
G Min. ground clearance	470	470
C Ground clearance of counterweight	1025	1,050
D Tail swing radius/Tail radius	2,890/2,770	2890/2770

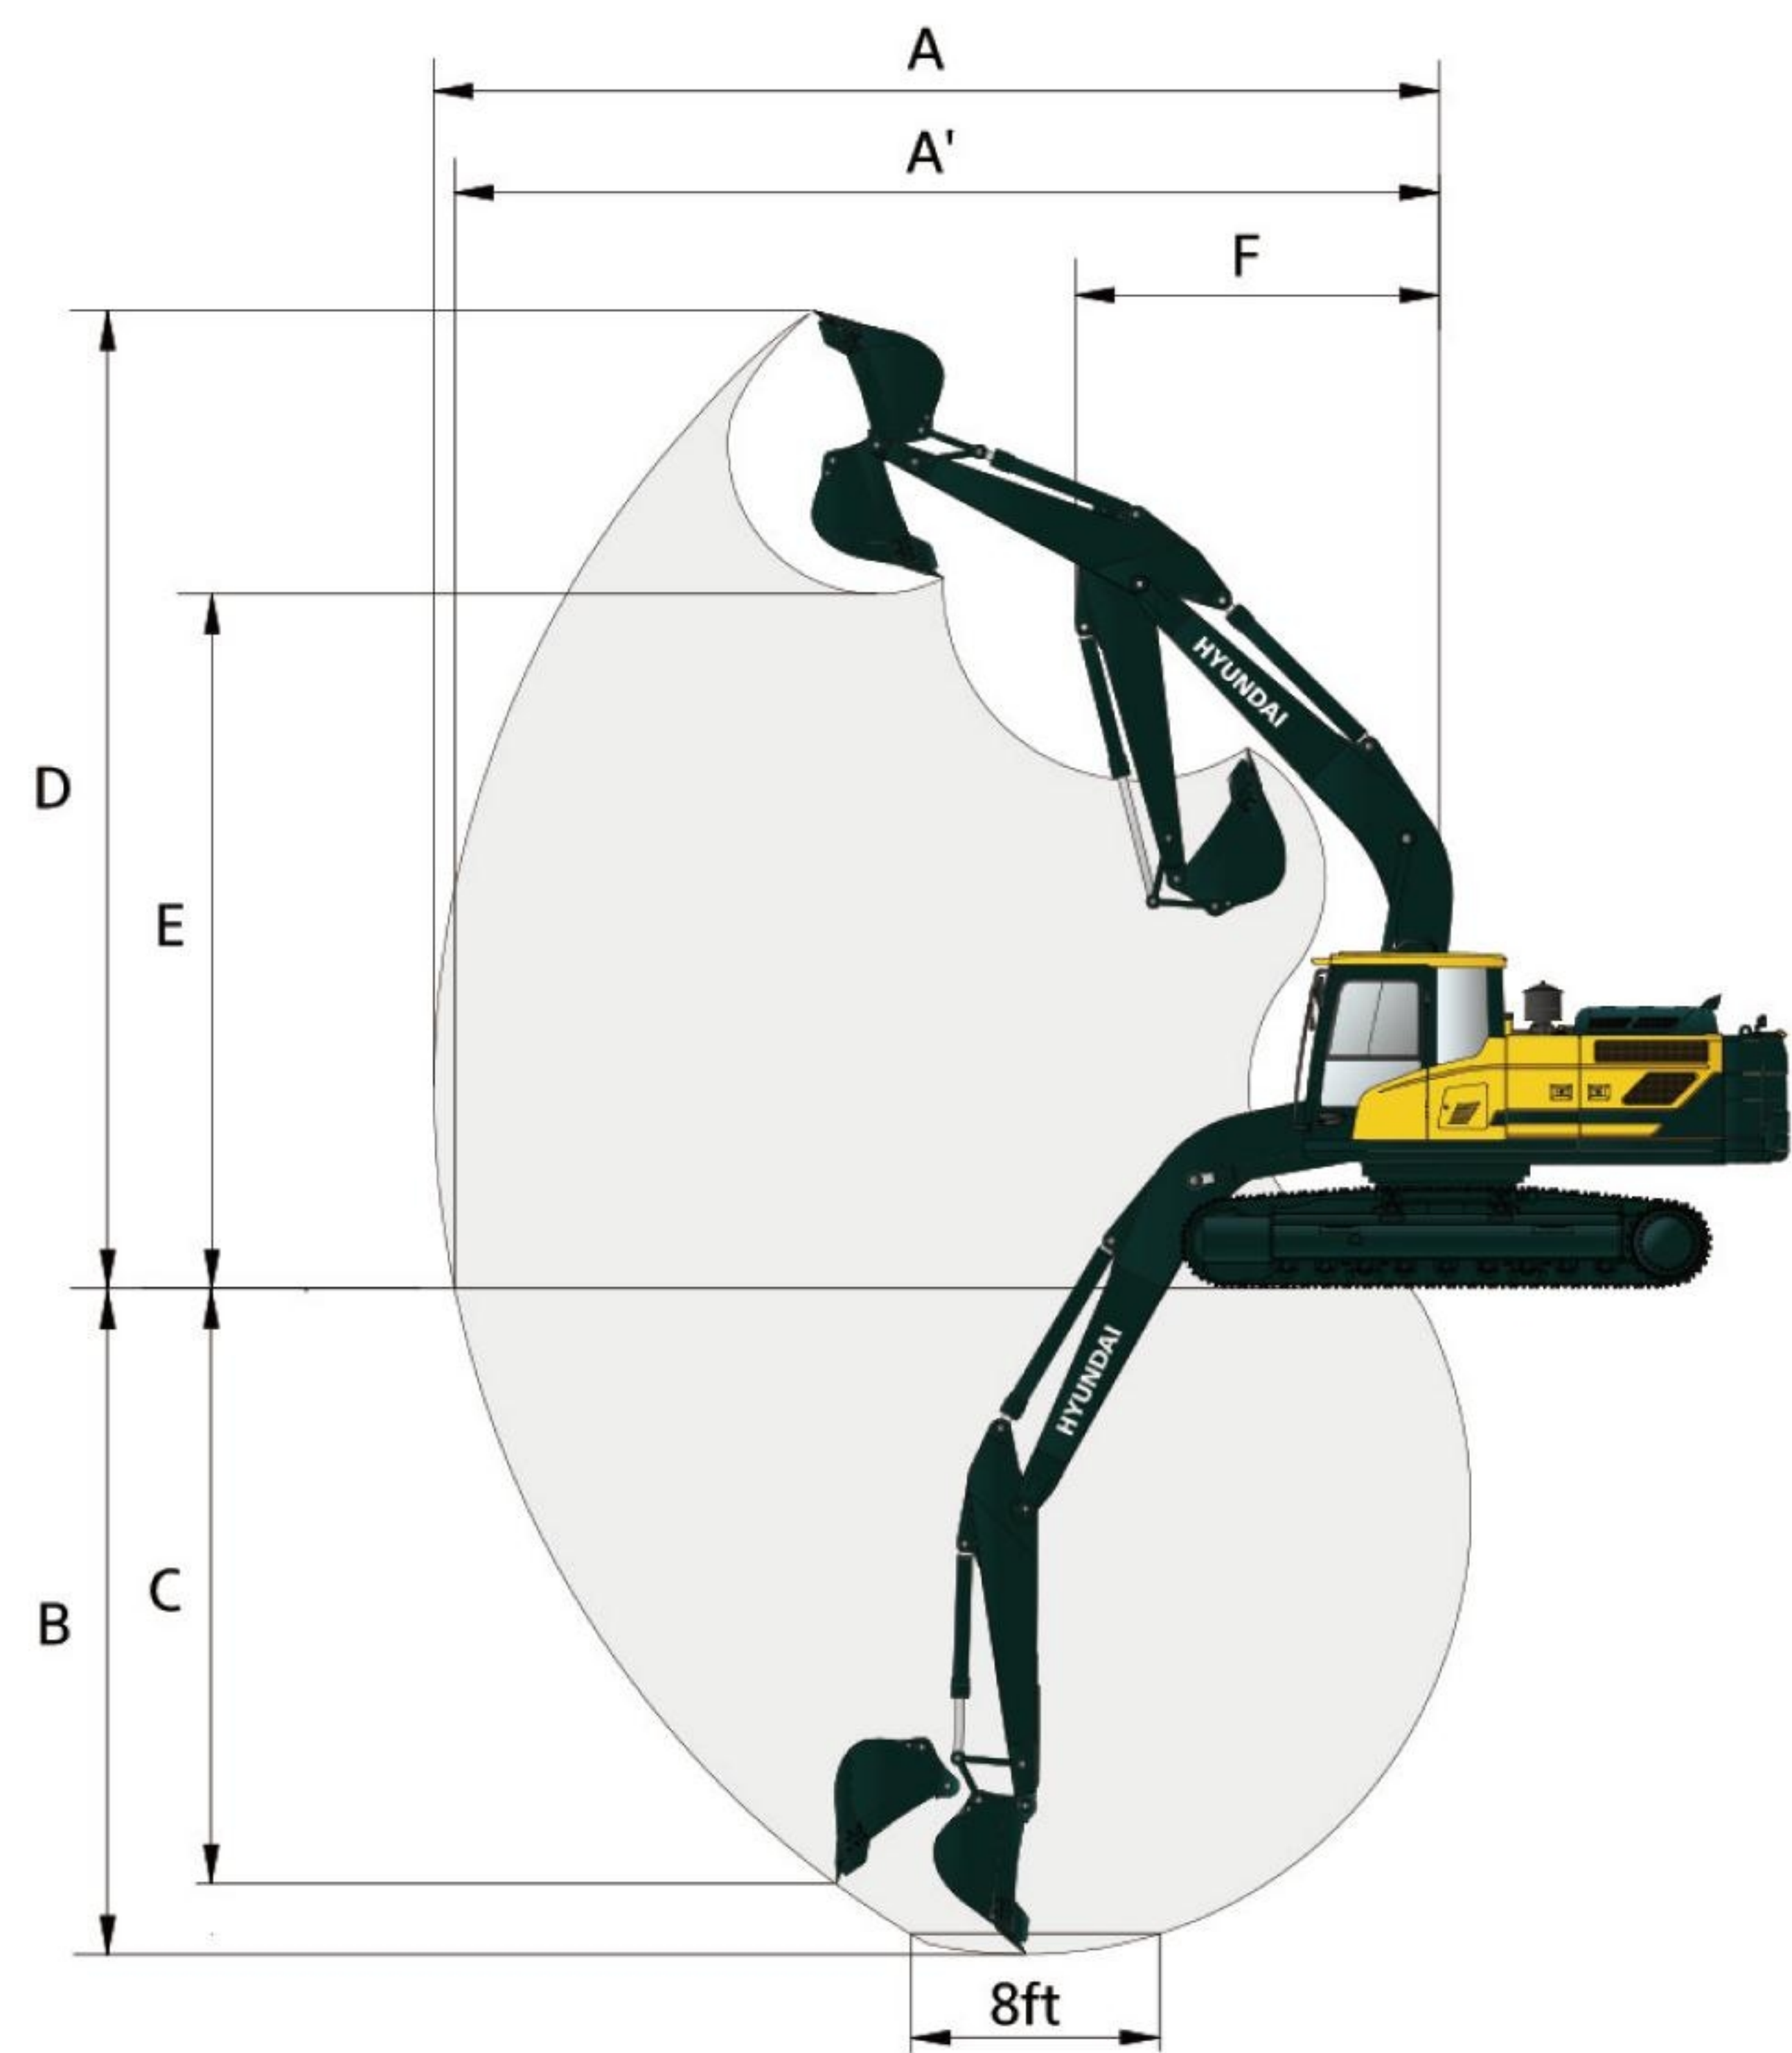

Boom Length	5,680mm
Arm Length	2,700mm
Bucket Capacity	0.9m ³
A Max. Digging Reach	9,760mm
A' Max. Digging Reach on Ground	9,600mm
B Max. Digging Depth	6,520mm
B' Max. Effective Digging Depth	6,330mm
C Max. Vertical Wall Digging Depth	5,960mm
D Max. Digging Height	9,450mm
E Max. Dumping Height	6,640mm
F Min. Swing Radius	3,730mm

▲ Please contact for special requirement of options.

